



MOBILT system consists of galvanized mesh panels, system of connecting elements and stabilizing feet. It is used in places where construction sites and road works do not require closed fences.



14 YEARS OF EXPERIENCE IN PRODUCTION


6 DIFFERENT VERSIONS AVAILABLE



14 COMPLEMENTARY ACCESORIES



* -Manufacturer certified according to EN 1090-1 issued by TUV SUD (Z527 notified body)

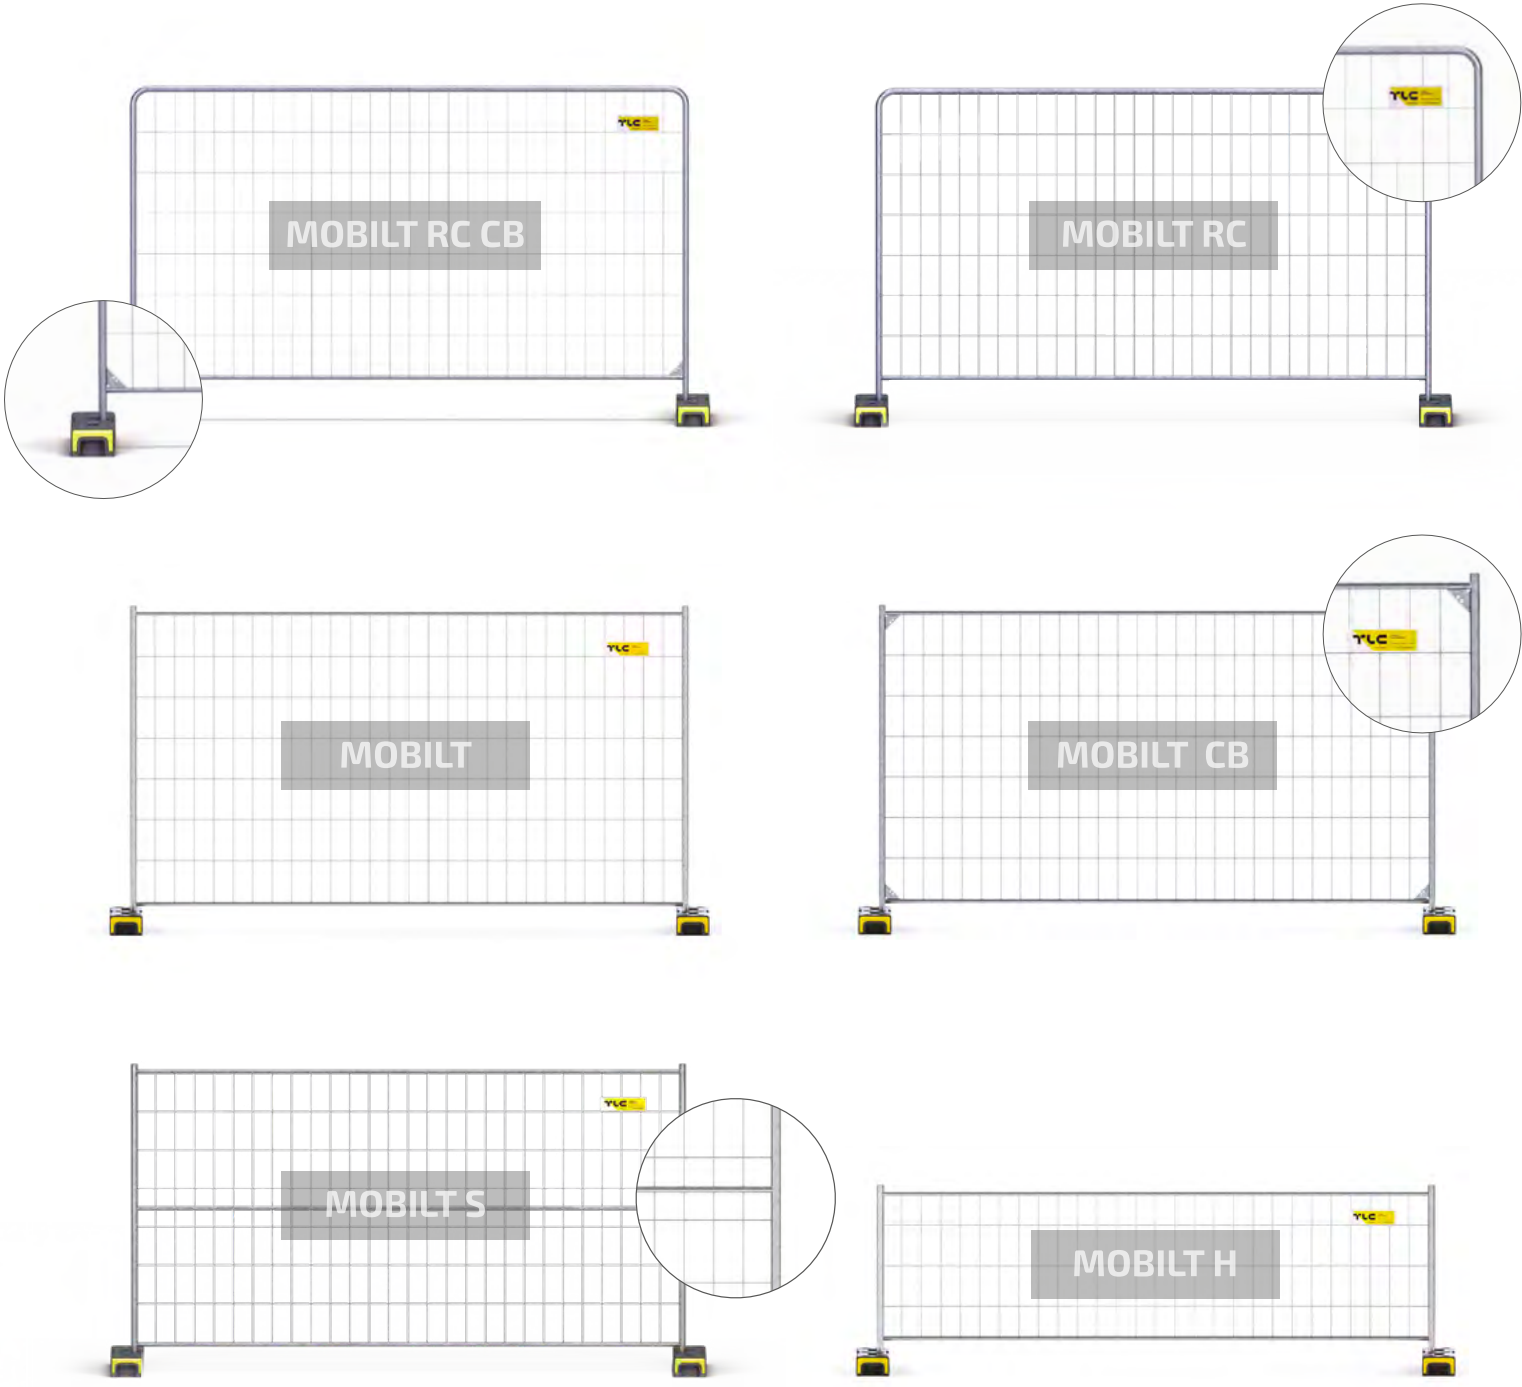

type	size	weight	additional reinforcement	mesh eye	wire diameter
MOBILT RC CB	3430 x 2000 mm	12,62 kg	corner reinforcement (2 pcs)	120 x 250 mm	3,0 mm
MOBILT RC		12,42 kg	no		
MOBILT		11,9 kg	no		
MOBILT CB		12,3 kg	corner reinforcement (4 pcs)		
MOBILT S		14,1 kg	additional pipe		
MOBILT H		3430 x 1200 mm	9,8 kg		

The information in this advertising material is for reference only. The product specification should be subject to verification with technical data provided by the manufacturer.